

PPM series (90W~375W, 1mV/0.1mA)

Introduction

PPM series are high precision programmable DC power supply with single output, output power rated from 90W to 375W with various model numbers. PPM series are featured with low regulation 0.01%, low ripple and noise 1mVrms, automatic continuous or dynamic load change, battery charge function. MPU control, RS-232/RS-485/USB interface for PC control, the PPM series facilitates auto test and auto control. The commands of the PPM series are compliant with SCPI commands. Users can easily develop programs to facilitate different applications in auto test and auto control. Digital input fulfilled by rotary dial and keypad input, fast and accurate. Voltage and current regulations by software, avoids human error and makes the PPM series more accurate.

Features

- ✓ 0.01% low regulation, high accuracy and high resolution
- ✓ Over load, over voltage, over current, over temperature and reverse polarity protections
- ✓ Constant voltage and constant current operations, auto CV and CC switch
- ✓ Automatic continuous or dynamic load change
- ✓ 1mVrms low ripple & noise
- ✓ 4.3-inch backlit Segment LCD display
- ✓ High speed rotary dial and keypad input
- ✓ Built-in beeper alarm
- ✓ Panel lock and output ON/OFF function
- ✓ List mode function, 300 sets save & recall for voltage, current and time setups, easy use in auto test
- ✓ Dual range output (only for PPM-3603D, PPM-3605D)
- ✓ Remote sense function (except PPM-3H12, PPM-5H07)
- ✓ Display load resistance value
- ✓ Battery charge mode
- ✓ Standard RS-232 interface, support SCPI commands, support Labview
- ✓ Optional RS-485 interface, support Modbus
- ✓ Optional RS-232 to USB cable
- ✓ Optional 0-5V analog control (except PPM-3H12, PPM-5H07)

Programmable Linear DC Power Supply



Product photo



(Rated Current ≤10A)



(Rated Current >10A)

Selection Guide


We have different series of laboratory programmable power supplies. Each of them has their own remarkable features.

	PPA	PPS	PPW	PPM	TPM
Display	4.3-inch TFT LCD	4.3-inch TFT LCD	4.3-inch LCD	4.3-inch LCD	122*32 LCD
Rated Power	400W 850W 1500W	300W 600W 900W	300W 600W 900W	90W~375W	90W~180W
Voltage Ripple	50mVpp	30mVpp	30mVpp	1mVrms	1mVrms
USB Host	√	√	✗	✗	✗
USB Device	✗	✗	✗	✗	✓
RS232	√	√	√	√	✗
RS485	√	√	Optional	Optional	✗
Analog Control 0-5V	✗	√	Optional	Optional	✗
Remote Sensing	√	√	√	√	✗
Battery Charge Mode	√	√	√	√	✗
Low resistance measurement	√	√	√	√	✗
List Mode	√	√	√	√	✓
19-Inch Rack Compatible	√	√	√	√	✗
Data logger	Optional	Optional	✗	✗	✗

Display and Control Panel

Output voltage, output current and output time can be set through digital keypad or rotary knob. Actual values of output voltage and output current can be represented in waveform display.

To prevent unintentional operations, all operation controls can be locked.

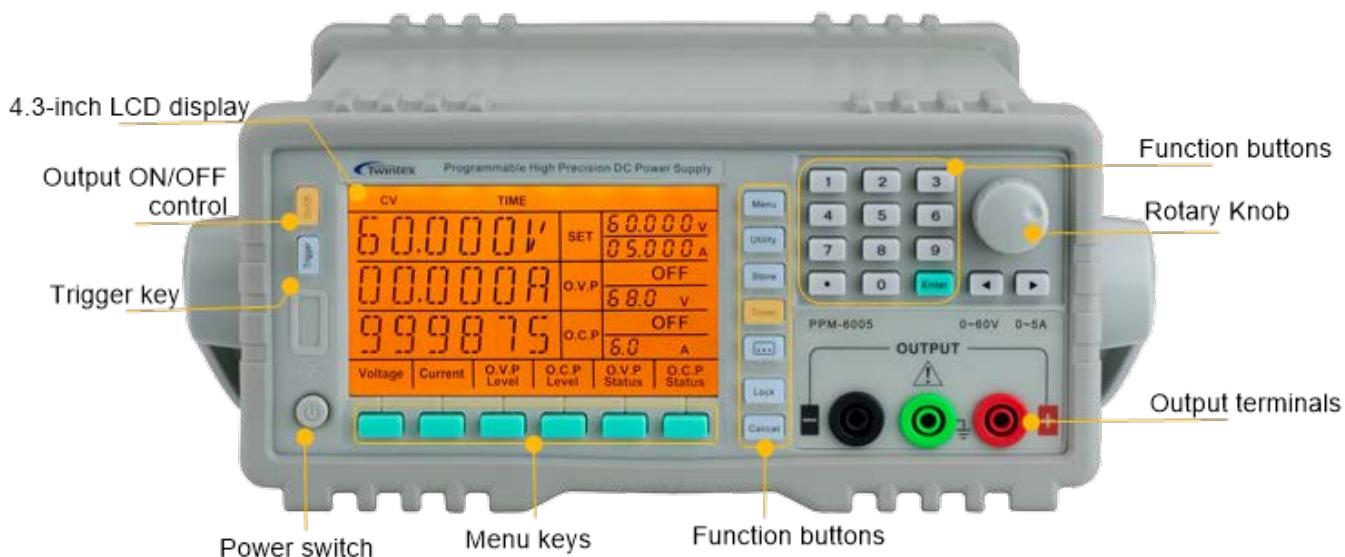

Programmable Linear DC Power Supply



Specifications (90W ~ 180W)

Model	PPM-3003	PPM-3005	PPM-3603	PPM-3605	PPM-6003	PPM-6005					
Rated output (0°C~40°C)											
Voltage	0~32V	0~32V	0~40V	0~40V	0~64V	0~64V					
Current	0~3.2A	0~5.5A	0~3.2A	0~5.5A	0~3.2A	0~5.5A					
O.V.P	0.1~36V	0.1~36V	0.1~42V	0.1~42V	0.1~68V	0.1~68V					
O.C.P	0.1~3.6A	0.1~6.0A	0.1~3.6A	0.1~6.0A	0.1~3.6A	0.1~6.0A					
Constant Voltage Operation											
Line regulation	$\leq 0.01\% + 3mV$										
Load regulation	$\leq 0.01\% + 3mV (I \leq 3A); \leq 0.02\% + 5mV (I > 3A)$										
Ripple & Noise	$\leq 1mV_{rms} (I \leq 3A); \leq 2mV_{rms} (I > 3A) (5Hz \sim 1MHz)$										
Recovery time	$\leq 100\mu s$ (50% load change, minimum load 0.5A)										
Constant Current Operation											
Line regulation	$\leq 0.1\% + 3mA$										
Load regulation	$\leq 0.1\% + 3mA (I \leq 3A); \leq 0.1\% + 5mA (I > 3A)$										
Ripple & Noise	$\leq 3mA_{rms} (I \leq 3A), \leq 6mA_{rms} (I > 3A)$										
Display											
Voltmeter	5 digits LCD display										
Ammeter	5 digits LCD display										
Setting resolution	1mV/0.1mA										
Reading resolution	1mV/0.1mA										
Setting accuracy	Voltage	$\pm(0.03\% \text{ of reading} + 10mV) (25 \pm 5^\circ C)$									
	Current	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of FS}) (25 \pm 5^\circ C)$									
Reading accuracy	Voltage	$\pm(0.02\% \text{ of reading} + 5mV) (25 \pm 5^\circ C)$									
	Current	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of FS}) (25 \pm 5^\circ C)$									
General											
Protection	Over load, over voltage, over current, over temperature and reverse polarity protections										
Panel lock	Provided										
Remote sense function	Maximum compensation voltage 5% of FS										
Battery charge	Lithium battery curve charge										
Interface	RS232 interface, Support SCPI commands										
	Optional RS485 interface, support ModBus										
	Optional RS232 to USB cable										
	Optional 0-5V analog control										
Memory	300 sets										
Insulation	Between base and terminals: $\geq 20M\Omega / 500VDC$										
	Between base and AC power cord: $\geq 30M\Omega / 500VDC$										
Operating environment	Indoor use		Altitude: $\leq 2000m$		Ambient temperature: 0~40°C						
	Relative humidity: $\leq 80\%$		Installation category: II		Pollution degree: 2						
Storage environment	$-10^\circ C \sim 70^\circ C, \leq 70\%RH$										
Power source	AC110V/220V $\pm 10\%$ selectable, 50/60Hz										
Accessories	Power cord x1, Operation manual x1, RS232 cable x1, Software CD x1										
Dimension	215Wx89Hx352D mm										
Weight	6.8kg	6.8kg	6.8kg	8kg	8kg	8kg					

Programmable Linear DC Power Supply



Specifications (120W ~ 375W)

Model	PPM-2010	PPM-3010	PPM-7503	PPM-7505	PPM-12001	PPM-12002	PPM15H15										
Rated output (0°C~40°C)																	
Voltage	0~22V	0~32V	0~80V	0~80V	0~128V	0~128V	0~160V										
Current	0~11A	0~11A	0~3.2A	0~5.5A	0~1.1A	0~2.2A	0~1.6A										
O.V.P	0.1~24V	0.1~36V	0.1~84V	0.1~84V	0.1~134V	0.1~134V	0.1~180V										
O.C.P	0.1~12A	0.1~12A	0.1~3.6A	0.1~6.0A	0.1~1.2A	0.1~2.4A	0.1~1.8A										
Constant Voltage Operation																	
Line regulation	≤0.01%+3mV																
Load regulation	≤0.01%+3mV (I≤3A); ≤0.02%+5mV (I>3A)																
Ripple & Noise	≤1mVrms (I≤3A); ≤2mVrms (I>3A); ≤3mVrms (V≥75V) (5Hz~1MHz)																
Recovery time	≤100us (50% load change, minimum load 0.5A)																
Constant Current Operation																	
Line regulation	≤0.1%+3mA																
Load regulation	≤0.1%+3mA (I≤3A); ≤0.1%+5mA (I>3A)																
Ripple & Noise	≤3mArms (I≤3A), ≤6mA rms (I>3A)																
Display																	
Voltmeter	5 digits LCD display																
Ammeter	5 digits LCD display																
Setting resolution	1mV/1mA	2mV/0.1mA		10mV/0.1mA													
Reading resolution	1mV/1mA	1mV/0.1mA		10mV/0.1mA													
Setting accuracy	Voltage	±(0.03% of reading + 10mV) (25±5°C)															
accuracy	Current	±(0.1% of reading + 0.1% of FS) (25±5°C)															
Reading accuracy	Voltage	±(0.02% of reading +5mV) (25±5°C)															
accuracy	Current	±(0.1% of reading + 0.1% of FS) (25±5°C)															
General																	
Protection	Over load, over voltage, over current, over temperature and reverse polarity protections																
Panel lock	Provided																
Remote sense function	Maximum compensation voltage 5% of FS																
Battery charge	Lithium battery curve charge																
Interface	RS232 interface, Support SCPI commands																
	Optional RS485 interface, support ModBus																
	Optional RS232 to USB cable																
	Optional 0-5V analog control																
Memory	300 sets																
Insulation	Between base and terminals: ≥20MΩ/500VDC																
	Between base and AC power cord: ≥30MΩ/500VDC																
Operating environment	Indoor use		Altitude: ≤2000m		Ambient temperature: 0~40°C												
	Relative humidity: ≤80%		Installation category: II		Pollution degree: 2												
Storage environment	-10°C~70°C, ≤70%RH																
Power source	AC110V/220V±10% selectable, 50/60Hz																
Accessories	Power cord x1, Operation manual x1, RS232 cable x1, Software CD x1																
Dimension	215Wx89Hx352D mm																
Weight	8kg	8.5kg	8kg	8kg	8.5kg	6.8kg	8kg										
							6.8kg										

Programmable Linear DC Power Supply



Specifications (240W ~ 360W)

Model	PPM-1820	PPM-12003	PPM-3H12	PPM-5H07			
Rated output (0°C~40°C)							
Voltage	0~19V	0~128V	0~330V	0~500V			
Current	0~21A	0~3.2A	0~1.2A	0~0.7A			
O.V.P	0.1~21V	0.1~134V	0.1~360V	0.1~550V			
O.C.P	0.1~22A	0.1~3.6A	0.01~1.32A	0.01~0.8A			
Constant Voltage Operation							
Line regulation	$\leq 0.01\% + 3\text{mV}$						
Load regulation	$\leq 0.01\% + 3\text{mV} (I \leq 3\text{A})$; $\leq 0.02\% + 5\text{mV} (I > 3\text{A})$						
Ripple & Noise (5Hz~1MHz)	$\leq 1\text{mVrms}$	$\leq 2.5\text{mVrms}$	$\leq 10\text{mVrms}$	$\leq 10\text{mVrms}$			
Recovery time	$\leq 100\text{us}$ (50% load change, minimum load 0.5A)						
Constant Current Operation							
Line regulation	$\leq 0.1\% + 3\text{mA}$						
Load regulation	$\leq 0.05\% + 3\text{mA} (I \leq 3\text{A})$; $\leq 0.05\% + 5\text{mA} (I > 3\text{A})$						
Ripple & Noise	$\leq 5\text{mAms}$	$\leq 1\text{mAms}$	$\leq 1\text{mAms}$	$\leq 1\text{mAms}$			
Display							
Voltmeter	5 digits LCD display						
Ammeter	5 digits LCD display						
Setting resolution	$1\text{mV}/1\text{mA}$	$10\text{mV}/0.1\text{mA}$	$10\text{mV}/0.1\text{mA}$	$10\text{mV}/0.1\text{mA}$			
Reading resolution	$1\text{mV}/1\text{mA}$	$10\text{mV}/0.1\text{mA}$	$10\text{mV}/0.1\text{mA}$	$10\text{mV}/0.1\text{mA}$			
Setting accuracy (25±5°C)	Voltage	$\pm(0.03\% \text{ of reading} + 10\text{mV})$		$\pm(0.03\% \text{ of reading} + 30\text{mV})$			
	Current	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of FS})$					
Reading accuracy (25±5°C)	Voltage	$\pm(0.02\% \text{ of reading} + 5\text{mV})$		$\pm(0.02\% \text{ of reading} + 30\text{mV})$			
	Current	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of FS})$					
General							
Protection	Over load, over voltage, over current, over temperature and reverse polarity protections						
Panel lock	Provided						
Remote sense function	Max. compensation voltage 0.5 of FS		X	X			
Battery charge	Lithium battery curve charge						
Interface	RS232 interface, Support SCPI commands Optional RS485 interface, support ModBus Optional RS232 to USB cable Optional 0-5V analog control						
Memory	100 sets						
Insulation	Between base and terminals: $\geq 20\text{M}\Omega/500\text{VDC}$ Between base and AC power cord: $\geq 30\text{M}\Omega/500\text{VDC}$						
Operating environment	Indoor use Relative humidity: $\leq 80\%$	Altitude: $\leq 2000\text{m}$ Installation category: II	Ambient temperature: 0~40°C Pollution degree: 2				
Storage environment	-10°C~70°C, $\leq 70\%\text{RH}$						
Power source	AC110V/220V±10% selectable, 50/60Hz						
Accessories	Power cord x1, Operation manual x1, RS232 cable x1, Software CD x1						
Dimension	215Wx89Hx412D mm						
Weight	9.8kg	9.8kg	10.2kg	10.2kg			

Specifications are subject to change without prior notice.